

TUB / SHOWER

Oasis



MULTI-PIECE MODEL

TS-P-56 (2-piece)

Rough-In Dimensions

60" wide x 33-1/4" deep x 76-1/4" high

Finished Dimensions

60" wide x 32" deep x 75" high

Unit Features




- Two - Piece Fiberglass Composite Construction
- Sanitary Grade Polyester Gelcoat Surface
- 2" Dia. Drain / RH or LH (see reverse side for location)
- 2-1/2" Dia. Overflow (see reverse side for location)
- Elevated Back Wall Shelf
- Lower Level Soap Tray with Acrylic Rod
- Textured Floor Pattern
- Balsa Wood Core Floor Structure

Special Notes

- Optional ABF Model (provides 3-1/2-inches of drain clearance)
- UL Listed Whirlpool System Available (see reverse side for details)
- Unit Temporarily Assembled for Shipping

TS-P-56R ABF/6P (illustrated)

	Std Unit	ABF Unit
A	76-1/4"	78-1/4"
B	75"	77"
C	17-1/4"	19-1/4"
D	1-1/2"	3-1/2"
E	15"	17"
F	-	-

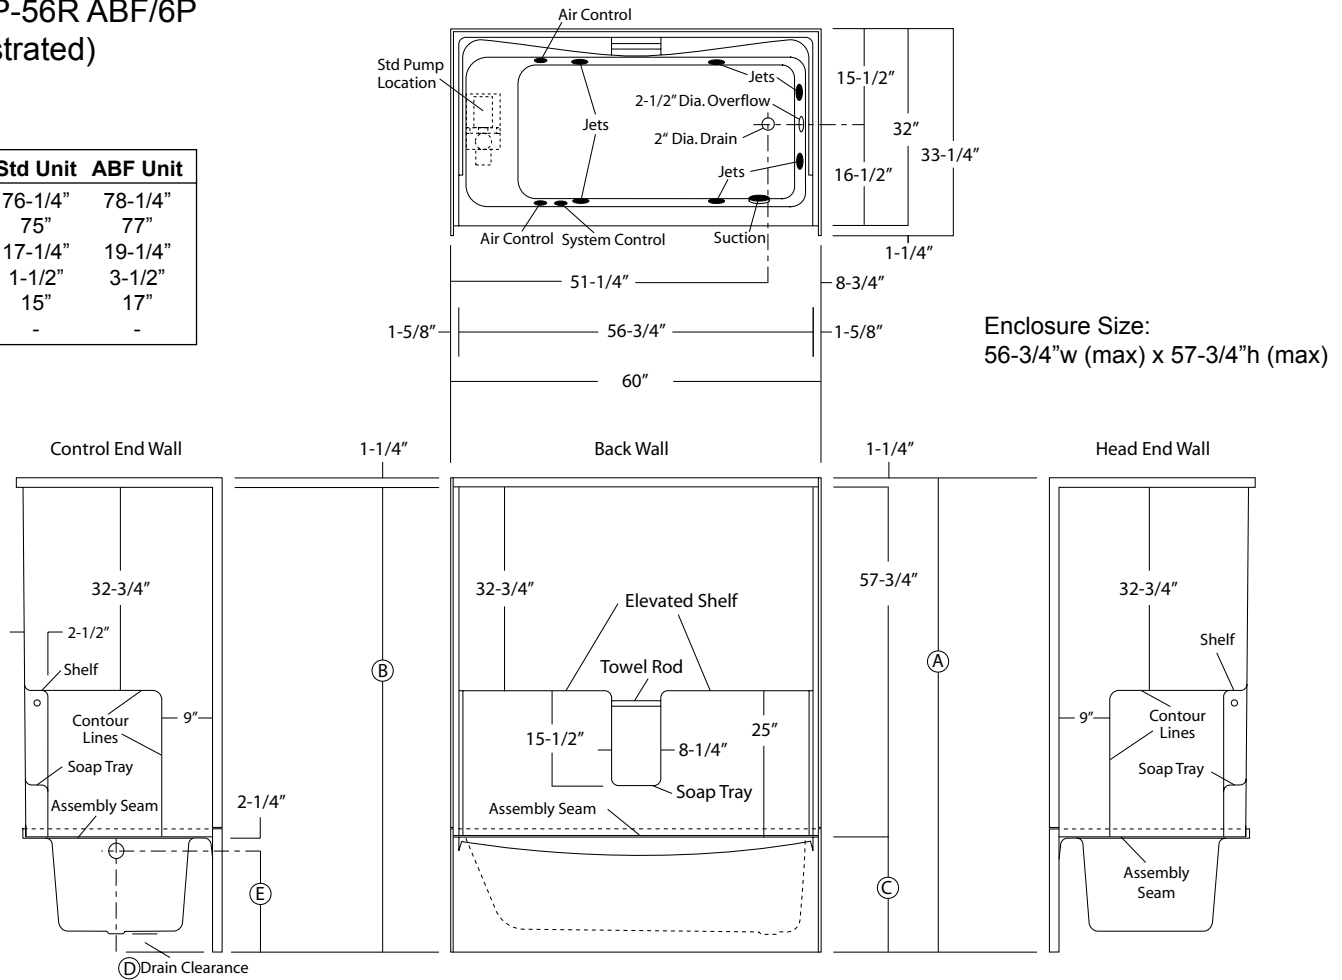

Enclosure Size:
56-3/4"w (max) x 57-3/4"h (max)

Tub/Shower Module

Order No.: TS-P-56R (RH drain)
TS-P-56R ABF (RH drain, Above Floor Rough)
TS-P-56L (LH drain)
TS-P-56L ABF (LH drain, Above Floor Rough)

60" x 32", two-piece gelcoated fiberglass tub/shower with 17-1/4" apron (ABF ver.: 19-1/4" apron with additional drain clearance for above floor plumbing), wall surround, acrylic towel rod, and end drain as indicated.

Whirlpool System

Order No.: TS-P-56R / 6P (RH drain)
TS-P-56R ABF / 6P (RH drain, Above Floor Rough)
TS-P-56L / 6P (LH drain)
TS-P-56L ABF / 6P (LH drain, Above Floor Rough)

Builder System includes: 6-Adjustable jets, twin-air injection controls, pneumatic on/off control, and 5.8 amp pump/motor.

Options: In-Line Heater (1*) (order code ILH)
Ozone Generator (1*) (order code OZG)

Notes: (1*) Factory installed options
(2*) Includes system control upgrade

Removable access panel currently not available for this model.

Sump Dimensions: 48" long x 24" wide x 15" deep
Sump Capacity: 52 gal. (unoccupied - to overflow)
Whirlpool Operating: 33 gal.